


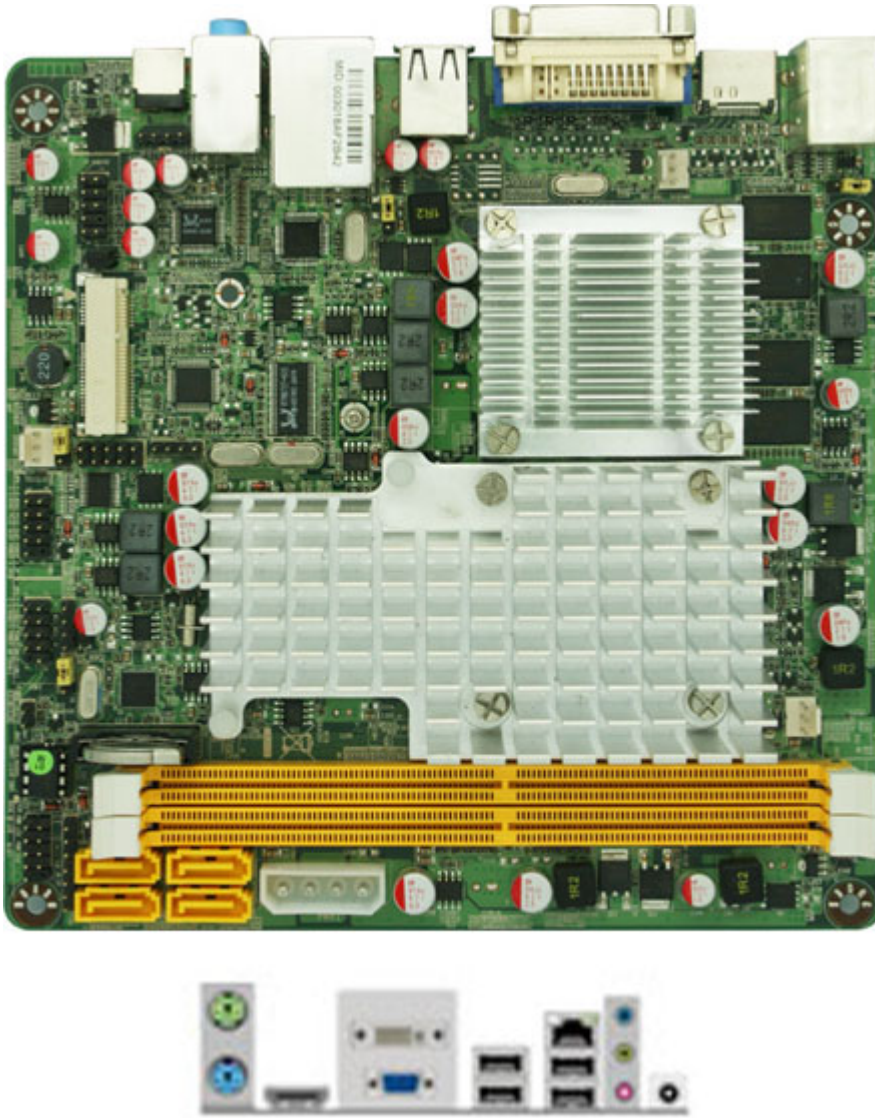

198.00 EUR

incl. 19% VAT, plus [shipping](#)

- INTEL® Atom Processor D510 / D525 + NM10 Express Chipset +NVIDIA® ION2 GPU
- Support INTEL® Atom Processor D510 / D525
- Support Single Channel DDR 800 / 667
- Supports 10 / 100 / 1000 LAN
- Integrated ALC662 HD Audio CODEC with 6-CH
- Compliance with EuP standard
- Support CPU Smart FAN
- Support ACPI S3 Function
- Support Power on board
- **CPU**

- **Chipset**
- **Memory**

- **Storage**

- **Audio**
- **Ethernet LAN**

- INTEL ® Atom Processor D510 (45nm, 1.66GHz,1024MB L2 Cache)
- INTEL ® Atom Processor D525 (45nm, 1.80GHz,1024MB L2 Cache)
- INTEL® Atom Processor D510 / D525 +NM10 Express Chipset
- 2 \* 240-pin DIMM Sockets for un-buffered Single Channel DDR2 800/667 SDRAM up to 4 GB
- 4 \* Serial ATA2 3Gb/s connectors. SATA 3 & 4 Support RAID 0, 1, JBOD
- Realtek ALC662 6-Channel HD Audio CODEC
- Realtek 8111DL 10/100/1000 LAN

- **USB**
  - **Special Features**
  - **Rear Panel I/O**
  - **Internal I/O**
  - **BIOS**
  - **Functional**
  - **Certificate**
  - **Temperature**
  - **Form Factor**
- Embedded 7 \* USB 2.0/1.1
  - 
  - Intel Atom Processor D510 / D525
  - Support DC FAN
  - Support CPU Smart Fan
  - 4 \* USB 2.0/1.1 ports
  - 1 \* PS/2 KB/MS Connector
  - 1 \* Audio I/O ports ( Line-in, MIC and Line-out ) & 1 \* Optical Out
  - 1 \* VGA port / 1 \* DVI-D port / 1 \* HDMI port
  - 1 \* 12V DC in
  - 1 \* Gigabit LAN
  - 2 \* USB 2.0 headers for 3 \* USB 2.0 ports
  - 3\* FAN headers
  - 1 \* CD IN /1 \* GPIO
  - 1 \* AUDIO header
  - 1 \* CIR header
  - 1 \* COM header
  - 1 \* MINI PCI-E connector
  - AMI Flash ROM Write protect
  - Data Storage, medical Equipment, Media Center application, Networking, General Application, Gaming Machine
  - CE, FCC, RoHS
  - Operating within 0~50 centigrade (**Suggest to use system FAN**)
  - Storage within -20-85 centigrade
  - Mini ITX Form Factor(17cmx17cm)

**Product Accessories**

- COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield
- SATA-Slim ODD Cable+Power