


218.00 EUR
incl. 19% VAT, plus [shipping](#)

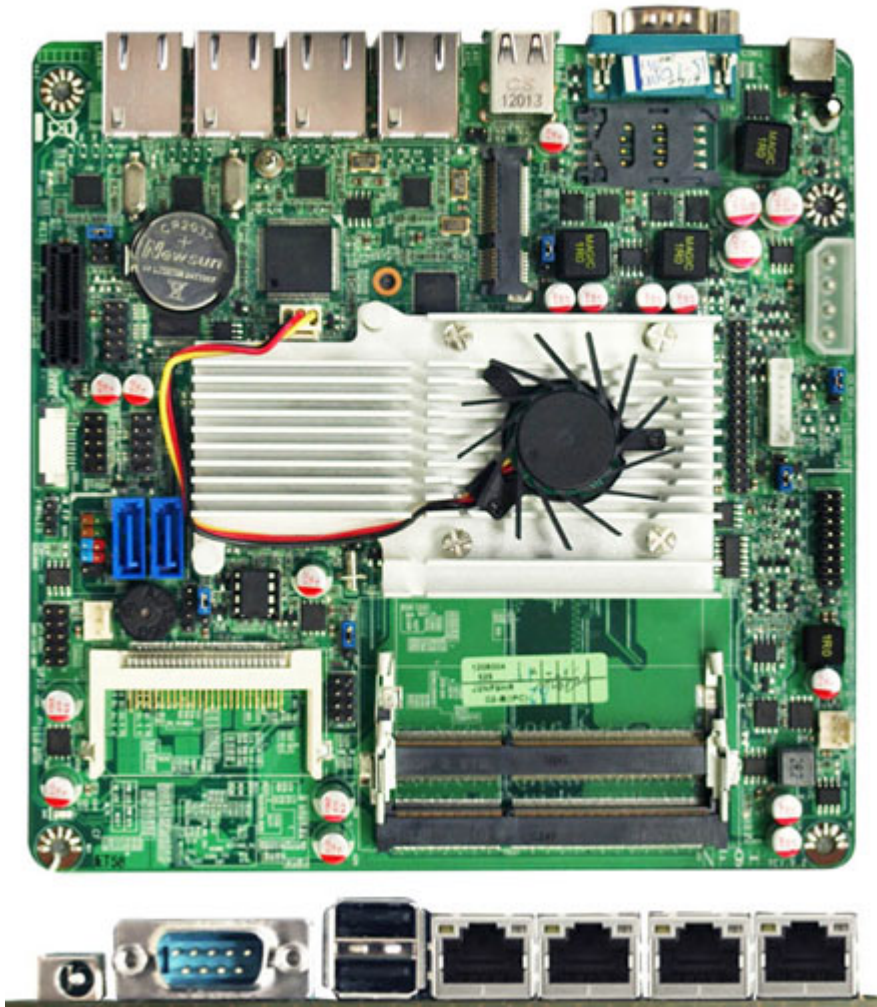

- INTEL® Atom Processor D525 + ICH8M Chipset
- Support INTEL® Atom D525 (Dual Core) CPU
- Support 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- Support CPU Smart FAN
- Integrated 18-bit Single Channel LVDS
- 4 * Realtek RTL8111EVL Gigabit LAN
- Support CF card
- Support SIM card (optional)
- Supports ACPI S3 Function
- Support Watch dog Technology
- Support +12V Power onboard

| | |
|--------------------------|--|
| • CPU | • INTEL® Atom D525 (Dual Core) CPU |
| • Chipset | • INTEL® Atom Processor D525 + ICH8M Chipset |
| • Memory | • 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB |
| • Expansion Slots | • 1 * PCI-E x 1 slot • 1 * MINI PCI-E |
| • Storage | • 2 * Serial ATA2 3Gb/s connectors • 1 * CF card socket • 1 * mSATA (Selectable with Mini PCI-E) |
| • Ethernet LAN | • 4 * Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN |
| • LVDS | • Onboard 18-bits single channel LVDS connector |
| • USB | • Embedded 6 * USB 2.0/1.1 |

| | |
|-------------------------|---|
| Special Features | <ul style="list-style-type: none"> • Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog |
| Rear Panel I / O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 ports • 4 * RJ-45 ports • 1 * COM port • 1 * 12V DC in |
| Internal I / O | <ul style="list-style-type: none"> • 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports • CPU /NB / Chassis Fan connectors; • 1 * 32-pin LVDS headers & 1 * GPIO header • 1 * COM header (support RS232/422/485) • 1 * SIM card socket (optional) |
| BIOS | • AMI 16MB UEFI DIP Flash ROM |
| Form Factor | • Mini ITX Form Factor(170mm x 170mm) |
| Functional | • Networking Appliance |
| Certificate | • CE, FCC, RoHS |
| Temperature | <ul style="list-style-type: none"> • Operating within 0~60 centigrade • Storage within -20-85 centigrade |

Product Accessories

- Manual
- CD
- 1x SATA cable
- I/O shield
- 1x SATA power cable